


STANLEY®

400 / 600 / 700 SERIES

SPC FLOORING WITH i4F DROP-LOCK TECHNOLOGY

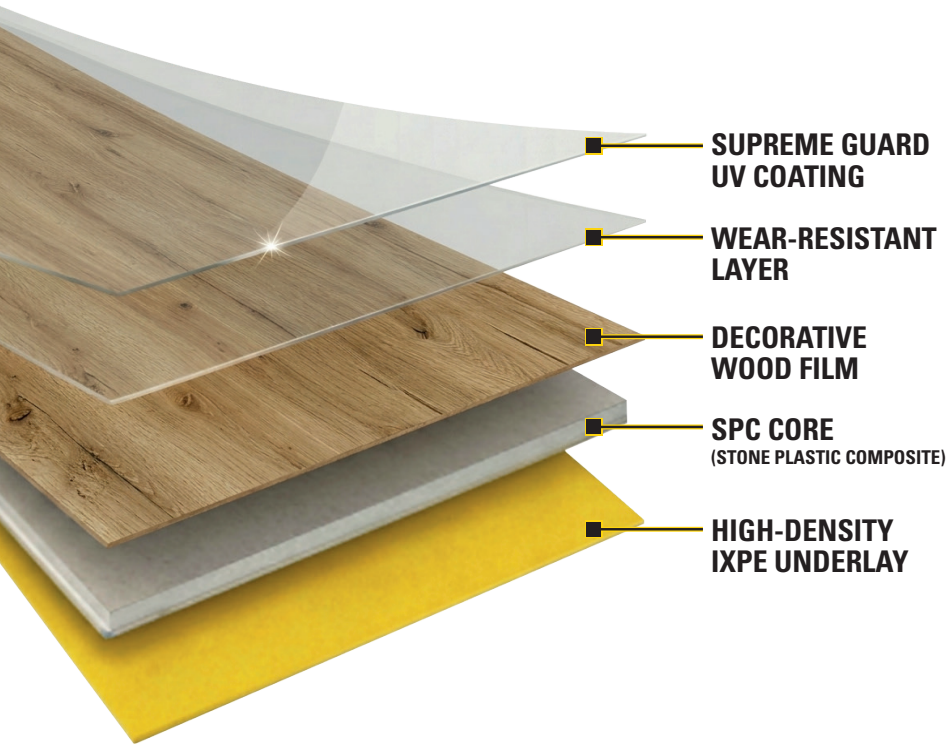

i4F Drop-Lock Technologies

Powered by Click4U® and 3L TripleLock®

PRODUCED UNDER LICENSE OF THE PATENTS LISTED @www.i4f.com/patents





ACOUSTIC SHIELD




WATERPROOF WEAR RESISTANT


KEY SPECIFICATIONS

WEAR LAYER	0.50 mm
TOTAL THICKNESS	5 + 1.5 mm
PLANK SIZE	228 x 1220 mm
INSTALLATION	i4F Drop-Lock Technology
WATER RESISTANCE	100% Waterproof
TREATMENT	Supreme Guard UV Coating
ACOUSTICS	ΔLw = 20 dB
UNDERFLOOR HEATING	Yes · max 27°C
USE CLASS (EN)	23 – 34
WARRANTY	Residential 25 yr Commercial 10 yr

RELATED PRODUCTS



800 SERIES FLOORING



900 SERIES WALL TILES

STANLEY® and the STANLEY logo are registered trademarks of Stanley Black & Decker Inc. and are used under licence.
All rights reserved. Imported and distributed by Area Floors, Kiezel Kleine Brogel 57, 3990 Peer, Belgium. www.areafloors.com.tr/stanley
Made in PRC For customer services please contact 2helpu.com

©2026 STANLEY TOOLS

STANLEY®

400 SERIES

AVAILABLE COLORS



CT401
HARVEST OAK
SX-FM-1.401.2.0.E
05430005313044



CT402
BARN OAK
SX-FM-1.402.2.0.E
05430005313051



CT403
RURAL OAK
SX-FM-1.403.2.0.E
05430005313068



CT405
YARD OAK
SX-FM-1.405.2.0.E
05430005313075

GENERAL SPECIFICATIONS

SIZE	228 x 1220 x 5 + 1.5 mm
TOTAL THICKNESS	6.5 mm
WEAR LAYER THICKNESS	0.50 mm
PIECES PER BOX	7 pcs
COVERAGE PER BOX	1.95 m²/box
GROSS WEIGHT PER BOX	20.36 kg
SURFACE TREATMENT	Supreme Guard UV Coating
SURFACE TEXTURE	Embossed in Register (EIR)
INSTALLATION	i4F Drop-Lock Technology
BEVEL	Microbevel
UNDERLAY	High-Density IXPE Underlay, 1.5 mm
INSTALLATION METHOD	Floating System
CORE MATERIAL	SPC Core (Stone Plastic Composite)
CORE DENSITY	2100 kg/m³
USE CLASS	Class 23 / Class 34
USAGE	Residential / Commercial
WARRANTY PERIOD	25 Years Residential 10 Years Commercial

TECHNICAL PERFORMANCE

WEAR RESISTANCE / ABRASION RESISTANCE	EN 16511:2023 ISO 24338	Class 34 / >= 7.000 cycles
SCRATCH RESISTANCE	EN 16094	MSR-A2 / MSR-B2
CASTOR CHAIR RESISTANCE	EN ISO 4918	Pass
FIRE RESISTANCE	EN 13501-1	Bfl-s1
CHEMICAL / STAIN RESISTANCE	EN ISO 26987 EN 438-2	OK / Grade 5
RESIDUAL INDENTATION	EN ISO 24343-1	<= 0.10 mm - Pass
THERMAL RESISTANCE	ISO 8302	0.0311 m²K/W
UNDERFLOOR HEATING	EN ISO 12524	Suitable, max. surface temperature 27°C
SLIP RESISTANCE	EN 13893	Class DS
IMPACT SOUND REDUCTION	EN ISO 10140-3 EN ISO 717-2	Delta Lw 20 dB
DIMENSIONAL STABILITY	EN ISO 23999	<= 0.15% - Pass
LOCK STRENGTH	EN 16511:2023 ISO 24334	Pass
LIGHT FASTNESS	EN ISO 105-B02	>= 6
STATIC ELECTRICAL PROPENSITY	EN 1815	Antistatic (<= 2 kV)
WATER RESISTANCE	Product specification	Waterproof

PACKAGING & LOGISTICS

PIECES PER BOX	7 pcs
COVERAGE PER BOX	1.95 m²/box
GROSS WEIGHT PER BOX	20.36 kg
CARTONS PER PALLET	45 cartons
PALLET CONFIGURATION	3 cartons per layer x 15 layers
COVERAGE PER PALLET	87.75 m²/pallet
GROSS PALLET WEIGHT	Approx. 956 kg

CERTIFICATES AND COMPLIANCE

CE MARKING / DOP	EN 14041:2004/AC2006	Compliant
INDOOR AIR EMISSIONS	French VOC Regulation	A+
ENVIRONMENTAL PRODUCT DECLARATION	ISO 14025 / EN 15804+A2	EPD
REACH / PHTHALATES	Regulation (EC) No. 1907/2006	Compliant / Ortho-phthalates free
QUALITY MANAGEMENT	ISO 9001:2015	Certified management system
ENVIRONMENTAL MANAGEMENT	ISO 14001:2015	Certified management system
OCCUPATIONAL HEALTH AND SAFETY	ISO 45001:2018	Certified management system

For customer services please contact 2helpu.com. Warranty is valid only when installed in accordance with STANLEY Flooring Installation Instructions. Specifications and designs may change without prior notice.

CE
EN 14041:2004/ AC2006

ISO
9001:2015
14001:2015
45001:2018

Phthalate Free

EPD
INTERNATIONAL EPD SYSTEM

STANLEY® and the STANLEY logo are registered trademarks of Stanley Black & Decker Inc. and are used under licence.
All rights reserved. Imported and distributed by Area Floors, Kiezel Kleine Brogel 57, 3990 Peer, Belgium. www.areafloors.com.tr/stanley
Made in PRC For customer services please contact 2helpu.com

©2026 STANLEY TOOLS

STANLEY®

600 SERIES


AVAILABLE COLORS




BB625
WHEAT RUSTIC OAK
SX-FM-1.625.2.0.E
05430005313167



BB626
HONEY RUSTIC OAK
SX-FM-1.626.2.0.E
05430005313174



BB627
TOBACCO RUSTIC OAK
SX-FM-1.627.2.0.E
05430005313181



BB628
PURE NATURAL
SX-FM-1.628.2.0.E
05430005313198



BB629
DARK NATURAL
SX-FM-1.629.2.0.E
05430005313204



BB630
WARM NATURAL
SX-FM-1.630.2.0.E
05430005313211



BB631
SOFT NATURAL
SX-FM-1.631.2.0.E
05430005313228



BB632
DEEP NATURAL
SX-FM-1.632.2.0.E
05430005313235

GENERAL SPECIFICATIONS

SIZE	228 x 1220 x 5 + 1.5 mm
TOTAL THICKNESS	6.5 mm
WEAR LAYER THICKNESS	0.50 mm
PIECES PER BOX	7 pcs
COVERAGE PER BOX	1.95 m²/box
GROSS WEIGHT PER BOX	20.36 kg
SURFACE TREATMENT	Supreme Guard UV Coating
SURFACE TEXTURE	Embossed in Register (EIR)
INSTALLATION	i4F Drop-Lock Technology
BEVEL	Microbevel
UNDERLAY	High-Density IXPE Underlay, 1.5 mm
INSTALLATION METHOD	Floating System
CORE MATERIAL	SPC Core (Stone Plastic Composite)
CORE DENSITY	2100 kg/m³
USE CLASS	Class 23 / Class 34
USAGE	Residential / Commercial
WARRANTY PERIOD	25 Years Residential 10 Years Commercial

TECHNICAL PERFORMANCE

WEAR RESISTANCE / ABRASION RESISTANCE	EN 16511:2023 ISO 24338	Class 34 / >= 7.000 cycles
SCRATCH RESISTANCE	EN 16094	MSR-A2 / MSR-B2
CASTOR CHAIR RESISTANCE	EN ISO 4918	Pass
FIRE RESISTANCE	EN 13501-1	Bfl-s1
CHEMICAL / STAIN RESISTANCE	EN ISO 26987 EN 438-2	OK / Grade 5
RESIDUAL INDENTATION	EN ISO 24343-1	<= 0.10 mm - Pass
THERMAL RESISTANCE	ISO 8302	0.0311 m²K/W
UNDERFLOOR HEATING	EN ISO 12524	Suitable, max. surface temperature 27°C
SLIP RESISTANCE	EN 13893	Class DS
IMPACT SOUND REDUCTION	EN ISO 10140-3 EN ISO 717-2	Delta Lw 20 dB
DIMENSIONAL STABILITY	EN ISO 23999	<= 0.15% - Pass
LOCK STRENGTH	EN 16511:2023 ISO 24334	Pass
LIGHT FASTNESS	EN ISO 105-B02	>= 6
STATIC ELECTRICAL PROPENSITY	EN 1815	Antistatic (<= 2 kV)
WATER RESISTANCE	Product specification	Waterproof

PACKAGING & LOGISTICS

PIECES PER BOX	7 pcs
COVERAGE PER BOX	1.95 m²/box
GROSS WEIGHT PER BOX	20.36 kg
CARTONS PER PALLET	45 cartons
PALLET CONFIGURATION	3 cartons per layer x 15 layers
COVERAGE PER PALLET	87.75 m²/pallet
GROSS PALLET WEIGHT	Approx. 956 kg

CERTIFICATES AND COMPLIANCE

CE MARKING / DOP	EN 14041:2004/AC2006	Compliant
INDOOR AIR EMISSIONS	French VOC Regulation	A+
ENVIRONMENTAL PRODUCT DECLARATION	ISO 14025 / EN 15804+A2	EPD
REACH / PHTHALATES	Regulation (EC) No. 1907/2006	Compliant / Ortho-phthalates free
QUALITY MANAGEMENT	ISO 9001:2015	Certified management system
ENVIRONMENTAL MANAGEMENT	ISO 14001:2015	Certified management system
OCCUPATIONAL HEALTH AND SAFETY	ISO 45001:2018	Certified management system

For customer services please contact 2helpu.com. Warranty is valid only when installed in accordance with STANLEY Flooring Installation Instructions. Specifications and designs may change without prior notice.

CE
EN 14041:2004/ AC2006

ISO
9001:2015
14001:2015
45001:2018

Phthalate Free

EPD
INTERNATIONAL EPD SYSTEM

STANLEY® and the STANLEY logo are registered trademarks of Stanley Black & Decker Inc. and are used under licence.
All rights reserved. Imported and distributed by Area Floors, Kiezel Kleine Brogel 57, 3990 Peer, Belgium. www.areafloors.com.tr/stanley
Made in PRC For customer services please contact 2helpu.com

©2026 STANLEY TOOLS

STANLEY®

700 SERIES

AVAILABLE COLORS



PS701
OPAL OAK
SX-FM-1.701.2.0.E
05430005313006



PS702
AZURE OAK
SX-FM-1.702.2.0.E
05430005313013



PS703
CRYSTAL OAK
SX-FM-1.703.2.0.E
05430005313020



PS704
ONYX OAK
SX-FM-1.704.2.0.E
05430005313037

GENERAL SPECIFICATIONS

SIZE	228 x 1220 x 5 + 1.5 mm
TOTAL THICKNESS	6.5 mm
WEAR LAYER THICKNESS	0.50 mm
PIECES PER BOX	7 pcs
COVERAGE PER BOX	1.95 m²/box
GROSS WEIGHT PER BOX	20.36 kg
SURFACE TREATMENT	Supreme Guard UV Coating
SURFACE TEXTURE	Embossed in Register (EIR)
INSTALLATION	i4F Drop-Lock Technology
BEVEL	Microbevel
UNDERLAY	High-Density IXPE Underlay, 1.5 mm
INSTALLATION METHOD	Floating System
CORE MATERIAL	SPC Core (Stone Plastic Composite)
CORE DENSITY	2100 kg/m³
USE CLASS	Class 23 / Class 34
USAGE	Residential / Commercial
WARRANTY PERIOD	25 Years Residential 10 Years Commercial

TECHNICAL PERFORMANCE

WEAR RESISTANCE / ABRASION RESISTANCE	EN 16511:2023 ISO 24338	Class 34 / >= 7.000 cycles
SCRATCH RESISTANCE	EN 16094	MSR-A2 / MSR-B2
CASTOR CHAIR RESISTANCE	EN ISO 4918	Pass
FIRE RESISTANCE	EN 13501-1	Bfl-s1
CHEMICAL / STAIN RESISTANCE	EN ISO 26987 EN 438-2	OK / Grade 5
RESIDUAL INDENTATION	EN ISO 24343-1	<= 0.10 mm - Pass
THERMAL RESISTANCE	ISO 8302	0.0311 m²K/W
UNDERFLOOR HEATING	EN ISO 12524	Suitable, max. surface temperature 27°C
SLIP RESISTANCE	EN 13893	Class DS
IMPACT SOUND REDUCTION	EN ISO 10140-3 EN ISO 717-2	Delta Lw 20 dB
DIMENSIONAL STABILITY	EN ISO 23999	<= 0.15% - Pass
LOCK STRENGTH	EN 16511:2023 ISO 24334	Pass
LIGHT FASTNESS	EN ISO 105-B02	>= 6
STATIC ELECTRICAL PROPENSITY	EN 1815	Antistatic (<= 2 kV)
WATER RESISTANCE	Product specification	Waterproof

PACKAGING & LOGISTICS

PIECES PER BOX	7 pcs
COVERAGE PER BOX	1.95 m²/box
GROSS WEIGHT PER BOX	20.36 kg
CARTONS PER PALLET	45 cartons
PALLET CONFIGURATION	3 cartons per layer x 15 layers
COVERAGE PER PALLET	87.75 m²/pallet
GROSS PALLET WEIGHT	Approx. 956 kg

CERTIFICATES AND COMPLIANCE

CE MARKING / DOP	EN 14041:2004/AC2006	Compliant
INDOOR AIR EMISSIONS	French VOC Regulation	A+
ENVIRONMENTAL PRODUCT DECLARATION	ISO 14025 / EN 15804+A2	EPD
REACH / PHTHALATES	Regulation (EC) No. 1907/2006	Compliant / Ortho-phthalates free
QUALITY MANAGEMENT	ISO 9001:2015	Certified management system
ENVIRONMENTAL MANAGEMENT	ISO 14001:2015	Certified management system
OCCUPATIONAL HEALTH AND SAFETY	ISO 45001:2018	Certified management system

For customer services please contact 2helpu.com. Warranty is valid only when installed in accordance with STANLEY Flooring Installation Instructions. Specifications and designs may change without prior notice.

CE
EN 13245-2:2009

ISO
9001:2015
14001:2015
45001:2018

Phthalate Free

EPD
INTERNATIONAL EPD SYSTEM

STANLEY® and the STANLEY logo are registered trademarks of Stanley Black & Decker Inc. and are used under licence.
All rights reserved. Imported and distributed by Area Floors, Kiezel Kleine Brogel 57, 3990 Peer, Belgium. www.areafloors.com.tr/stanley
Made in PRC For customer services please contact 2helpu.com

©2026 STANLEY TOOLS